



GLOBE SILENT CHECK VALVE

Model: KVS - 105




SPECIFICATION

- Designed to EN12334
- Pressure Rating: PN16 / PN25
- Working Medium: Water, Oil
- Working temperature: -10...+130°C
- Soft seated for perfect tightness
- Closes quickly before reverse flow actually occurs, eliminating slamming and water hammer risks
- Flanged to BS 4504 / BS EN 1092
- Suitable for mounting in horizontal and vertical pipe
- Other flange standards available upon request
- ANSI standards available upon request



GLOBE SILENT CHECK VALVE

Model: KVS - 105

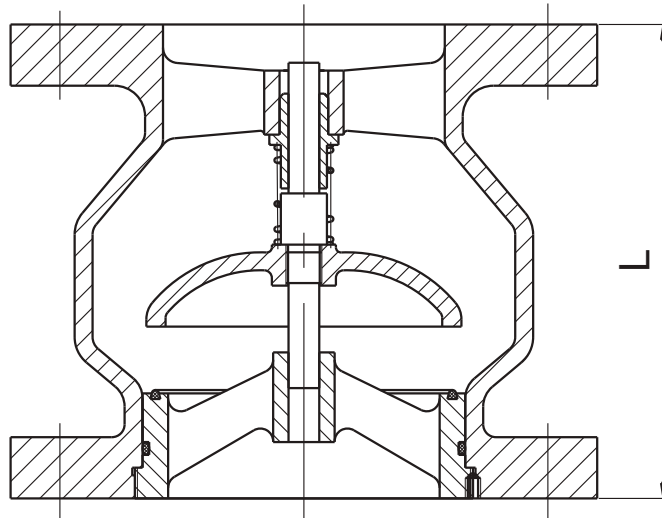

MATERIALS SCIFICATION

Description	Material
Body	Cast Iron, Ductile Iron
Disc	Ductile Iron / Bronze / Stainless Steel
Seat	Bronze / Stainless Steel
Seat Ring	EPDM / NBR
Spring	Stainless Steel

DIMENSION (mm)

Size	Inches	2"	2½"	3"	4"	5"	6"	8"
	mm	50	65	80	100	125	150	200
L		100	120	143	170	200	233	303

Size	Inches	10"	12"	14"	16"	18"	20"	24"
	mm	250	300	350	400	450	500	600
L		373	410	405	448	476	524	610