



Y - PATTERN STRAINER

Model: KVS - 200 F




SPECIFICATION

- Pressure Rating: PN16 / PN25
- Working Medium: Water, Oil
- Standard: DIN 3202 F1
- Bolted cover with drain plug, Stainless Steel Mesh
- Working temperature: -10...+120°C
- Epoxy coating, external and internal
- Flanged to BS 4504 / BS EN1092
- ANSI standards available upon request



Y - PATTERN STRAINER

Model: KVS - 200 F

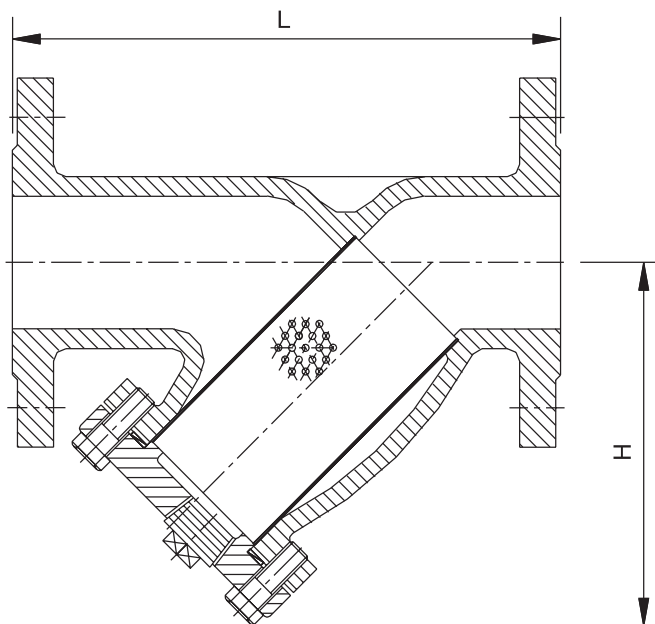

MATERIALS

Description	Material
Body	Cast Iron / Ductile Iron
Screen	Stainless Steel 304
Cover	Cast Iron / Ductile Iron
Plug	Steel

DIMENSIONS (mm)

Size	Inches	2"	2 1/2"	3"	4"	5"	6"	8"	10"	12"	14"	16"	18"	20"	24"
	mm	50	65	80	100	125	150	200	250	300	350	400	450	500	600
L		230	290	310	350	400	480	600	730	850	980	1100	1200	1250	1450
H		125	150	169	213	250	281	357	460	532	725	820	860	910	1020
Plug		1/2"	1"	1"	1"	1-1/4"	1-1/4"	1-1/2"	2"	2"	2"	2"	2"	2"	2"

SCREEN OF STRAINER

DN	DN50	DN65	DN80	DN100	DN125	DN150	DN200	DN250	DN300	DN350	DN400	DN450	DN500	DN600
Diameter of Hole (mm)	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	3	3	3	3	3
Free flow Area/cm2 (%)	33	33	33	40	40	40	40	40	40	40	40	40	40	40